

Wing Ding

SKU: NW-WD

Recommended Tools:

- ☐ 5/16" Hex Key
- ☐ 9/16" Wrench or Socket





Part Number	Part Description	Quantity
CUSTOM	Wing Ding Top Assembly	1
CUSTOM	Wing Ding Bottom Assembly with Arms	1
98306A389 & 98335A061	Locking Pins	2
KEE-75-7 or KEE-75-8	Locking Collars	2

Need help?

Call 1-800-932-3339 or
Email info@gymsupply.com

Step 1:

Slide the **Top Assembly** into the desired position on the cross pipe. Slide the **Locking Collars** against the Wing Ding, then tighten the set screws with a 5/16" Hex Key until secure.

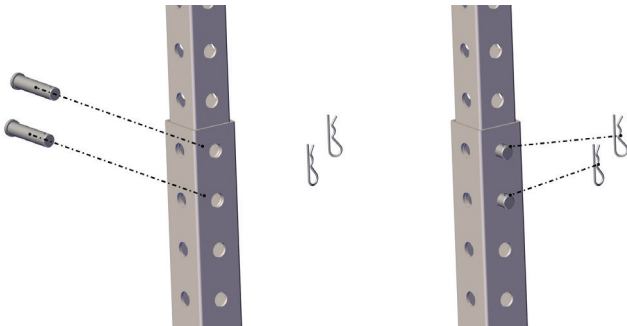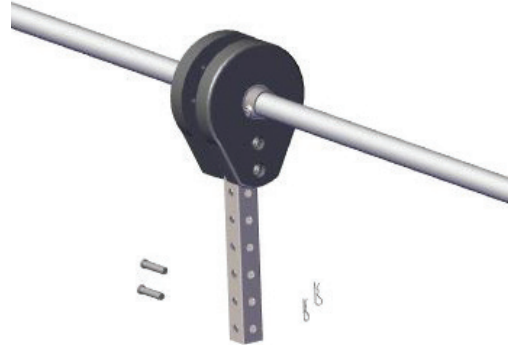

Step 2:

Insert the unistrut end of the **Top Assembly** into the larger unistrut of the **Bottom Assembly**. Secure the connection with the two **Locking Pins**.

Step 3:

To change the arm angle, use a 9/16" Wrench or Socket to loosen the 3/8" Hex Nut and remove the Carriage Bolt from the curved slot. Move the arm to the desired angle, then reinstall the bolt to lock it in place.

